

Information Sheet

ATTACK ZONE MR™

Part Number

60-102931

60-103200

Specifications

Blue and Red

Mica Reactive coverstock

Polished Finish

Hook Potential: 17.5 - 9.5 (dull/shiny)

Typical Length: 6

Typical Backend: 10

RG Max: 2.703

RG Min: 2.662

Diff. RG: 0.041

Average RG: 7.2

Track Flare: 8.1

Black and Gold

Mica Reactive coverstock

Polished Finish

Hook Potential: 17.5 - 9.5 (dull/shiny)

Typical Length: 6

Typical Backend: 10


RG Max: 2.703

RG Min: 2.662

Diff. RG: 0.041

Average RG: 7.2

Track Flare: 8.1

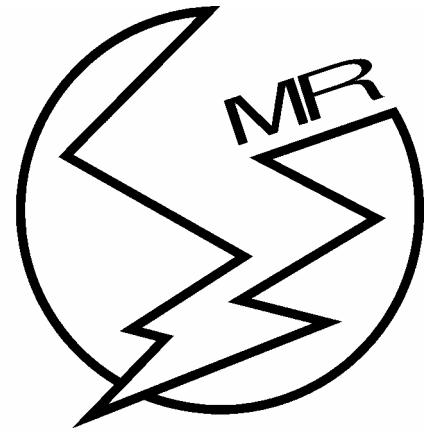


Reaction Characteristics

Attack Zone MR™ features a two-color reactive reactive coverstock with “mica” additive and an all-new high differential, three-piece puck augmented core to further enhance ball performance at the promotional price point. Attack Zone MR™ features the highest hook potential and back end reaction of any ball in its class.

The Attack Zone MR™ is perfect for medium to dry lane conditions and the entire spectrum of bowler styles.

Notes on Drilling

Note: The Attack Zone MR's high differential three piece puck augmented high performance puddle core are marked by a riser pin. All weights of the **Attack Zone** line can be drilled using the techniques developed for two-piece balls. See Brunswick's "Seven Popular Layouts" for detailed drilling information.

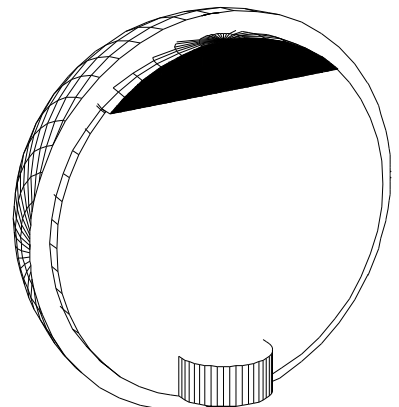


Brunswick®


SEVEN POPULAR LAYOUTS

MAXIMUM
TRACK FLARE
HIGH
REACTIVITY


1-Leverage Pin with 9" hole




2-Leverage Pin-heavy spot toward grip center




3-Leverage Pin with Axis hole




5-Pin between Axis and Leverage




4-Positive label shift



6-Axis Pin with 9" hole



7-Negative label shift



MINIMUM
TRACK FLARE
LOW
REACTIVITY

(P) = Pin

(H) = Heavy Spot

(A) = Axis

(BLH) = Balance hole