

# Information Sheet

## ATTACK ZONE™

### Specifications

**Black - reactive**      **Blue Sanded - conventional**

**60-102929**              **60-102927**

**Copper - reactive**    **Green Pearl - conventional**

**60-102930**              **60-102928**

Reactive Urethane    Conventional urethane

<b>Hook Potential:</b>	10 - 3 (dull/shiny)	10 - 3 (dull/shiny)
<b>Typical Length:</b>	7	8.5
<b>Typical Backend:</b>	8.5	5.5
<b>RG Max:</b>	2.695	2.705
<b>RG Min:</b>	2.674	2.684
<b>Diff. RG:</b>	0.021	0.021
<b>Average RG:</b>	8.4	8.7
<b>Track Flare:</b>	4.5	4.5



### Reaction Characteristics

In the all new Attack Zone™ series, Brunswick engineers have combined superior technology, used in our high performance line to produce four mid-price promotional masterpieces that put the finishing touches on the worlds Perfect Line Up of bowlingballs.

The **Attack Zone** series features two balls perfect for medium to dry lane conditions and the entire spectrum of bowler styles.

### Notes on Drilling

Note: The top dead center of the puddle weight blocks are marked by a riser pin. All weights of the **Attack Zone** line can be drilled using the techniques developed for two-piece balls. See Brunswick's "Seven Popular Layouts" for detailed drilling information.

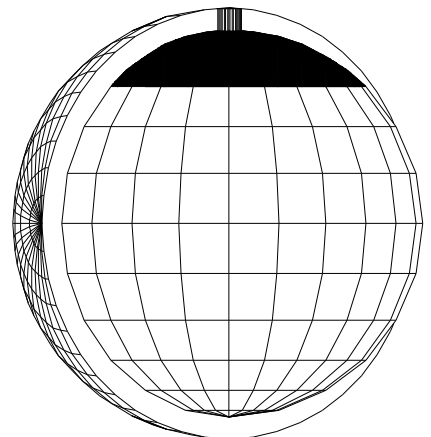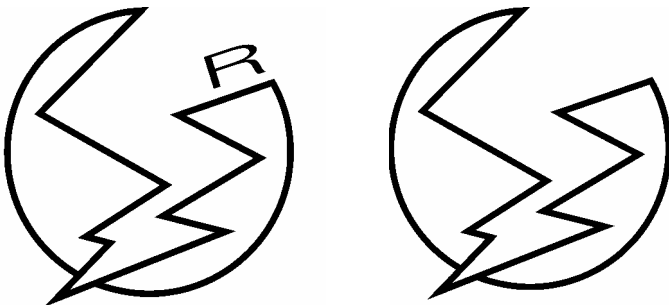


# Brunswick®


## SEVEN POPULAR LAYOUTS

MAXIMUM  
TRACK FLARE  
HIGH  
REACTIVITY


1-Leverage Pin with 9" hole




2-Leverage Pin-heavy spot toward grip center




3-Leverage Pin with Axis hole




5-Pin between Axis and Leverage




4-Positive label shift



6-Axis Pin with 9" hole



7-Negative label shift



MINIMUM  
TRACK FLARE  
LOW  
REACTIVITY

(P) = Pin

(H) = Heavy Spot

(A) = Axis

(BLH) = Balance hole