

Information Sheet

'tude 3 Purple/Silver

Specifications

4-component design with a
3-part compound core
Highly Reactive Cover Stock
Polished
Hook Potential: 19 - 11(dull/shiny)
Typical Length: 2 - 3
Typical Backend: 11
Center/Cover Heavy: 1.7
Track Flare Potential: 10+




Reaction Characteristics

The Attitude 3, the latest addition to the newest brand in the Brunswick arsenal, combines an **“Edge”** of Brunswick’s exclusive reactive urethane material and all-new multiple-color reactive urethane coverstock molding process and new **“Guts”**, a high performance combination of multiple density materials for unsurpassed on lane performance.

While **‘tude3** is toned down in its appearance from its predecessors, its performance is anything but, with the most aggressive hooking action available on the market today. Best suited for medium to oily lane surfaces.

Notes on Drilling


All weights of **‘tude 3** can be drilled using the techniques developed for two-piece balls. See Brunswick’s “Seven Popular Layouts” for detailed drilling information.

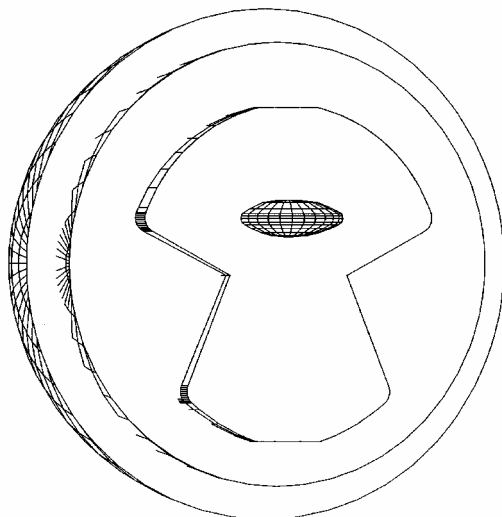


SEVEN POPULAR LAYOUTS

MAXIMUM
TRACK FLARE
HIGH
REACTIVITY


1-Leverage Pin with 9" hole




2-Leverage Pin-heavy spot toward grip center




3-Leverage Pin with Axis hole




4-Positive label shift




5-Pin between Axis and Leverage



6-Axis Pin with 9" hole



7-Negative label shift



MINIMUM
TRACK FLARE
LOW
REACTIVITY

(P) = Pin

(H) = Heavy Spot

(A) = Axis

(BLH) = Balance hole