

# Information Sheet

## 'tude 2 orange/black

### Specifications

5-component design with a  
4-part compound core  
Highly Reactive Cover Stock  
Polished  
Hook Potential: 18.5-10.5(dull/shiny)  
Typical Length: 4  
Typical Backend: 10+  
Center/Cover Heavy: 3.5  
Track Flare Potential: 9.2




### Reaction Characteristics

The all new **Attitude** combines an **“Edge”** of new reactive urethane material and all-new multiple-color urethane coverstock molding process and new **“Guts”**, a high performance combination of multiple density materials for unsurpassed on-lane performance.

**'tude 2** is a cover heavy design for medium to oily lanes with a single dense disc, producing more length down the lane before the ball makes its powerful move towards the pocket.

### Notes on Drilling


All weights of **'tude 2** can be drilled using the techniques developed for two-piece balls. See Brunswick's "Seven Popular Layouts" for detailed drilling information.

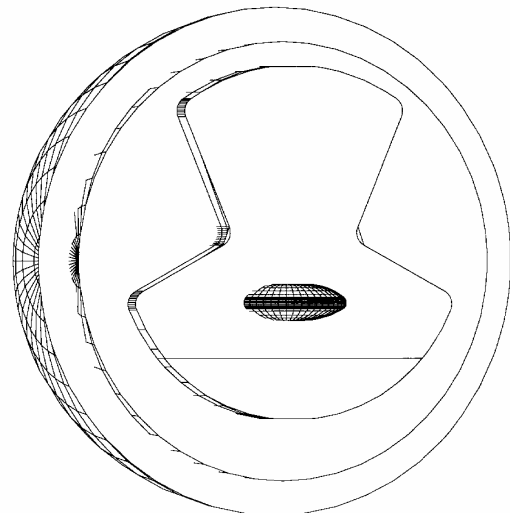


# SEVEN POPULAR LAYOUTS

MAXIMUM  
TRACK FLARE  
HIGH  
REACTIVITY


1-Leverage Pin with 9" hole

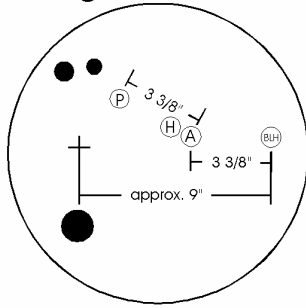


2-Leverage Pin-heavy spot toward grip center

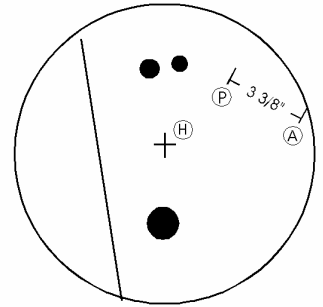


3-Leverage Pin with Axis hole

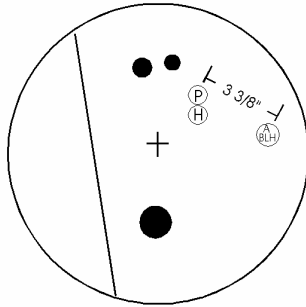


5-Pin between Axis and Leverage

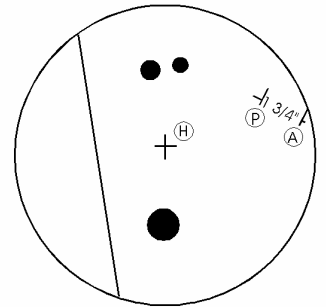


4-Positive label shift

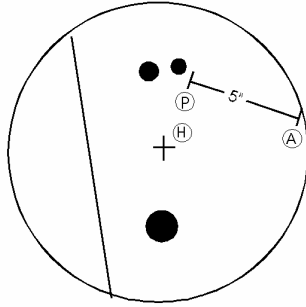

6-Axis Pin with 9" hole

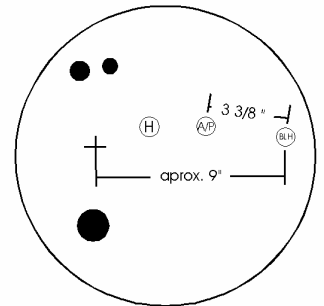

7-Negative label shift



MINIMUM  
TRACK FLARE  
LOW  
REACTIVITY

(P) = Pin

(H) = Heavy spot

(A) = Axis

(BLH) = Balance hole